

JP Application No. 2004-027036

-----

[Name of Document] Application for Patent

[Reference No.] 20040018

[Date of Filing] February 3, 2004

[Addressee] Commissioner of the Patent Office

[Int. Cl.] H02M 3/155

[Inventor]

[Address] c/o Murata Manufacturing Co., Ltd., 26-10,  
Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu

[Name] Tatsuya HOSOTANI

[Inventor]

[Address] c/o Murata Manufacturing Co., Ltd., 26-10,  
Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu

[Name] Hiroshi TAKEMURA

[Applicant for Patent]

[Id. No.] 000006231

[Name] Murata Manufacturing Co., Ltd.

[Agent]

[Id. No.] 100084548

[Patent Attorney]

[Name] Hisao KOMORI

[Application Fees]

[Prepayment Registration No.] 013550

[Amount of Payment] 21000

[List of Documents Attached]

[Name of Document] Claims 1

JP Application No. 2004-027036

-----

[Name of Document]      Specification    1

[Name of Document]      Drawings        1

[Name of Document]      Abstract        1

[No. of General Power of Attorney]      9004875

JP Application No. 2004-027036

-----

[Name of Document] CLAIMS

[Claim 1]

A switching power-supply unit including an inductor or a transformer and a plurality of switching elements switching a current flowing in the inductor or the transformer and converting power by turning on and off the switching elements, the switching power-supply unit comprising a switching control circuit that turns on the next switching element in accordance with a change of a voltage or a current generated due to turning off of a switching element in an ON-state, that sequentially turns on and off the switching elements in association with each other, that repeats a series of on-off operations of the switching elements periodically, that determines an ON-period of each of the switching elements in accordance with a condition independently provided for each of the switching elements, and that controls the ON-period of each of the switching elements.

[Claim 2]

The switching power-supply unit according to Claim 1, wherein a dead time in which two consecutive switching elements from among the plurality of switching elements are turned off is provided between ON-periods of the two switching elements, and wherein the dead time is arranged in accordance with a delay time from turning on of the

JP Application No. 2004-027036

-----

switching element in the ON-state and turning on of the next switching element.

[Claim 3]

The switching power-supply unit according to Claim 2, wherein the dead time is set such that the switching element is turned on when a voltage across the switching element becomes zero or reduces to near zero.

[Claim 4]

The switching power-supply unit according to any one of Claims 1 to 3, wherein the switching control circuit turns on the next switching element using a voltage at the inductor or the transformer generated due to turning off of the switching element in the ON-state from among the plurality of switching elements.

[Claim 5]

The switching power-supply unit according to any one of Claims 1 to 4, wherein the switching control circuit detects an output voltage to a load to determine the ON-period in accordance with the output voltage.

[Claim 6]

The switching power-supply unit according to any one of Claims 1 to 4, wherein the switching control circuit detects a change or a polarity of a voltage generated at the inductor or the transformer to determine the ON-period.

[Claim 7]

JP Application No. 2004-027036

-----

The switching power-supply unit according to any one of Claims 1 to 4, wherein the switching control circuit detects the current flowing in the inductor or the transformer to determine the ON-period.

[Claim 8]

The switching power-supply unit according to any one of Claims 1 to 4, wherein the switching control circuit detects a voltage across the switching element to determine the ON-period.

[Claim 9]

The switching power-supply unit according to any one of Claims 1 to 4, wherein the switching control circuit detects a current flowing in the switching element to determine the ON-period.

[Claim 10]

The switching power-supply unit according to Claim 9, wherein the switching control circuit determines the ON-period of the switching element such that the switching element is turned off when the current flowing in the switching element becomes zero or reaches near zero.

JP Application No. 2004-027036

-----

[Name of Document] SPECIFICATION

[Title of the Invention] SWITCHING POWER-SUPPLY UNIT

[Technical Field]

[0001]

The present invention relates to methods for controlling a switching power supply including a plurality of switching elements and, more particularly, to control methods not requiring an oscillation circuit.

[Background Art]

[0002]

Control procedures called PWM (Pulse Wide Modulation) systems and PFM (Pulse Frequency Modulation) systems are generally available as methods for controlling switching elements in switching power supplies (See Non-Patent Document 1).

[0003]

PWM systems are systems for controlling the ratio of an ON-period of a switching element to a switching period, and generally, the switching period is constant. In a case where a plurality of switching elements is provided, the ON-period ratios of the switching elements are equal to each other or inverted with respect to each other.

[0004]

PFM systems are systems for controlling a switching frequency, and generally, an ON-period ratio of a switching

JP Application No. 2004-027036

-----

element is constant. In a case where a plurality of switching elements is provided, the relationships between the ON-period ratios and the switching frequencies of the switching elements are equal to each other.

[Non-Patent Document 1] Electrical Engineering Handbook (Sixth Edition) by The Institute of Electrical Engineers of Japan, February 20, 2001, Vol. 20, Chapter 9, Section 2 Switching Regulator, pp851-852.

[Disclosure of the Invention]

[Problems to be Solved by the Invention]

[0005]

In known technologies, when a plurality of switching elements is provided, an oscillation circuit is also provided. A plurality of driving signals is produced based on an oscillation signal of the oscillation circuit, and the driving signals are transmitted to control terminals of the switching elements. Thus, if a delay time or an advanced time is generated in a path for transmitting the driving signals or a driving circuit, a phenomenon in which the plurality of switching elements is in an ON-state at the same time occurs even though the plurality of switching elements connected in series with each other must be driven in order. This phenomenon may not only prevent normal operation but may also destroy a power-supply unit due to an overcurrent or the like, thus significantly reducing

JP Application No. 2004-027036

-----

reliability.

[0006]

Thus, in order to avoid the phenomenon of the plurality of switching elements being in the ON-state at the same time, a dead time in which the plurality of switching elements is in an OFF-state at the same time is provided. However, since the dead time does not contribute to voltage conversion, providing a dead time whose length is unnecessarily long constitutes a factor to reduce the power conversion efficiency. In addition, since the ON-period ratio and the switching frequency change in PWM systems and PFM systems, respectively, it is very difficult to set the dead time properly, and a complicated configuration is required.

[0007]

In addition, in known technologies, obviously, an oscillation circuit functioning as a standard is required.

Furthermore, in known technologies, control to stabilize an output voltage by changing an ON-period of a switching element functioning as a standard is performed. For example, keeping an output voltage constant is the only one condition for the control.

[0008]

An object of the present invention is to solve problems due to a plurality of switching elements being in an ON-

JP Application No. 2004-027036

-----

state at the same time, to be capable of setting a plurality of conditions for control to satisfy predetermined conditions, and to provide a switching power-supply unit not requiring an oscillation circuit functioning as a standard.

[Means for Solving the Problems]

[0009]

(1) A switching power-supply unit according to the present invention including an inductor or a transformer and a plurality of switching elements switching a current flowing in the inductor or the transformer and converting power by turning on and off the switching elements is characterized by including a switching control circuit that turns on the next switching element in accordance with a change of a voltage or a current generated by turning off of a switching element in an ON-state, that sequentially turns on and off the switching elements in association with each other, that repeats a series of on-off operations of the switching elements periodically, that determines an ON-period of each of the switching elements in accordance with a condition independently provided for each of the switching elements, and that controls the ON-period of each of the switching elements.

[0010]

(2) The switching power-supply unit of (1) according to the present invention is characterized in that a dead

JP Application No. 2004-027036

-----

time in which two consecutive switching elements from among the plurality of switching elements are turned off is provided between ON-periods of the two switching elements and in that the dead time is arranged in accordance with a delay time from turning on of the switching element in the ON-state and turning on of the next switching element.

[0011]

(3) The switching power-supply unit of (2) according to the present invention is characterized in that the dead time is set such that the switching element is turned on when a voltage across the switching element becomes zero or reduces to near zero.

[0012]

(4) The switching power-supply unit of (1) to (3) according to the present invention is characterized by turning on the next switching element using a voltage at the inductor or the transformer generated due to turning off of the switching element in the ON-state from among the plurality of switching elements.

[0013]

(5) The switching power-supply unit of (1) to (4) according to the present invention is characterized in that the switching control circuit detects an output voltage to a load to determine the ON-period in accordance with the output voltage.

[0014]

(6) The switching power-supply unit of (1) to (4) according to the present invention is characterized in that the switching control circuit detects a change or a polarity of a voltage generated at the inductor or the transformer to determine the ON-period.

[0015]

(7) The switching power-supply unit of (1) to (4) according to the present invention is characterized in that the switching control circuit detects the current flowing in the inductor or the transformer to determine the ON-period.

[0016]

(8) The switching power-supply unit of (1) to (4) according to the present invention is characterized in that the switching control circuit detects a voltage across the switching element to determine the ON-period.

[0017]

(9) The switching power-supply unit of (1) to (4) according to the present invention is characterized in that the switching control circuit detects a current flowing in the switching element to determine the ON-period.

[0018]

(10) The switching power-supply unit of (9) according to the present invention is characterized in that the switching control circuit determines the ON-period of the

JP Application No. 2004-027036

-----

switching element such that the switching element is turned off when the current flowing in the switching element becomes zero or reaches near zero.

[Effects of the Invention]

[0019]

(1) According to the present invention, since turning off of a switching element in an ON-state causes the next switching element to be turned on, inconvenience of two switching elements being in an ON-state at the same time basically does not occur, thus improving the reliability of a switching power-supply unit.

In addition, in known technologies, control to stabilize an output by changing an ON-period of a switching element functioning as a standard is performed, and only one condition is provided for controlling the output voltage. In the present invention, however, two or more conditions, that is, at most conditions whose number corresponds to the number of switching elements, can be established.

In addition, the switching frequency is determined in accordance with the accumulation of ON-pulses of a switching element, and an ON-period of each switching element is set. Thus, an oscillation circuit is not required.

[0020]

(2) According to the present invention, a dead time based on a delay time of turning on and off of switching

JP Application No. 2004-027036

-----

elements is arranged between ON-periods of two consecutive switching elements from among the plurality of switching elements, and the reliability of the switching power-supply unit due to the plurality of switching elements turning on at the same time is improved. In addition, since the dead time is set in accordance with the delay time before turning on, the dead time can be properly set easily and the dead time is not unnecessarily increased or decreased even if the switching frequency and the ON-period ratio changes due to a change in the ON-period of each switching element. Thus, the power conversion efficiency can be kept high.

[0021]

(3) According to the present invention, since the switching element is turned on when the voltage across the switching element becomes zero or reduces to near zero, the switching loss can be significantly reduced and high efficiency can be achieved due to a zero-voltage switching operation of turning on at zero voltage.

[0022]

(4) According to the present invention, since the switching control circuit turning on the next switching element using the voltage at the inductor or the transformer generated due to turning off of a switching element in an ON-state from among the plurality of switching elements is provided, a voltage signal generated at the inductor or the

JP Application No. 2004-027036

-----

transformer can be easily captured as a trigger signal and the switching element can be used as a driving voltage. Thus, a simple circuit structure can be achieved.

[0023]

(5) According to the present invention, since an output voltage to a load is detected to determine the ON-period in accordance with the voltage, a constant-voltage power-supply unit can be easily configured.

[0024]

(6) According to the present invention, since a change (falling and rising) or the polarity of the voltage generated at the transformer is detected to determine the ON-period of the switching element, a voltage signal generated at the transformer can be easily used as a trigger signal. Thus, a simple circuit structure can be achieved.

[0025]

(7) According to the present invention, since the current flowing in the transformer is detected to determine the ON-period, for example, a conduction period of a rectifier diode and the ON-period of the switching element can be set equal to each other. Thus, an effective current and the peak value of a current flowing in the rectifier diode and the transformer can be reduced, and the conduction loss is thus reduced.

[0026]

JP Application No. 2004-027036

-----

(8) According to the present invention, since the voltage across the switching element is detected to determine the ON-period, the ON-state and the OFF-state of the switching element can be accurately determined, and this can be easily used as a trigger signal.

[0027]

(9) According to the present invention, since the switching control circuit detects the current flowing in the switching element to determine the ON-period, the state of the switching element can be accurately determined and the switching element can be controlled. Thus, a necessary and appropriate dead time can be provided.

[0028]

(10) According to the present invention, since the switching control circuit turns off the switching element when the current flowing in the switching element becomes zero or reaches near zero, the switching loss can be significantly reduced due to a zero-current switching operation of turning on at zero current. Thus, high efficiency can be achieved.

[Best Mode for Carrying Out the Invention]

[0029]

A switching power-supply unit according to a first embodiment will be described with reference to Fig. 1. Part (A) of Fig. 1 is a circuit diagram of the switching power-

JP Application No. 2004-027036

---

supply unit, and part (B) is an illustration showing the relationship between the waveform of each section of the switching power-supply unit and time.

[0030]

In part (A) of Fig. 1, Vi denotes an input power supply, and T denotes a transformer. A first switching element Q1 is connected to a primary winding Lp of the transformer T. For a secondary winding Ls of the transformer T, a first rectification and smoothing circuit constituted by a rectifier diode Ds1 and a smoothing capacitor C1 is provided. Also, a second rectification and smoothing circuit constituted by a rectifier diode Ds2, a second switching element Q2, and a second smoothing capacitor C2 is provided. In addition, a third rectification and smoothing circuit constituted by a rectifier diode Ds3, a third switching element Q3, and a third smoothing capacitor C3 is provided.

[0031]

A first switching control circuit CNT1 on/off-controls the first switching element Q1, a second switching control circuit CNT2 on/off-controls the second switching element Q2, and a third switching control circuit CNT3 on/off-controls the third switching element Q3. In the figure, a broken line entering each of the switching control circuits CNT1, CNT2, and CNT3 schematically indicates a trigger path, and a solid line entering each of the switching control circuits

JP Application No. 2004-027036

-----

CNT1, CNT2, and CNT3 schematically indicates a feedback path.

[0032]

The first switching control circuit CNT1, from among the switching control circuits, receives a voltage (transformer voltage  $V_t$ ) of the transformer T as a trigger, and turns on Q1 at a time when the drain voltage of Q1 falls. The first switching control circuit CNT1 also detects an output voltage  $V_{o1}$  of a first output terminal OUT1, and determines an ON-period of the first switching element Q1 such that  $V_{o1}$  is set to a predetermined voltage. In other words, the first switching control circuit CNT1 turns off Q1 at a time when the required ON-period of Q1 has passed.

[0033]

The second switching control circuit CNT2 receives the voltage (transformer voltage)  $V_t$  of the transformer T as a trigger, and turns on the second switching element Q2 at a time when the voltage (transformer voltage  $V_t$ ) of the transformer T inverts. Then, the second switching control circuit CNT2 detects a voltage  $V_{o2}$  of a second output terminal OUT2, and determines an ON-period of the second switching element Q2 such that  $V_{o2}$  is set to a predetermined voltage. In other words, the second switching control circuit CNT2 turns off Q2 at a time when the required ON-period of Q2 has passed.

[0034]

The third switching control circuit CNT3 receives a drain voltage of the second switching element Q2 as a trigger, and turns on Q3 at a time when the drain voltage of Q2 rises. Then, the third switching control circuit CNT3 detects a voltage Vo3 of a third output terminal OUT 3, and determines an ON-period of the third switching element Q3 such that Vo3 is set to a predetermined voltage. In other words, the third switching control circuit CNT3 turns off Q3 at a time when the required ON-period of Q3 has passed.

[0035]

In part (B) of Fig. 1,  $V_t$  represents the voltage (transformer voltage) of the transformer T, and Q1, Q2, Q3, and Ds represent the states of the first to third switching elements Q1 to Q3 and the first rectifier diode Ds1, respectively. Here, a high level represents an ON-state, and a low level represents an OFF-state.

[0036]

(1) State 1 [ $t_0$ - $t_1$ ]

First, when the voltage (transformer voltage  $V_t$ ) of the transformer T inverts at time  $t_0$ , after the passage of a delay time  $\Delta t_{d1}$  from the time  $t_0$ , the gate voltage of the first switching element Q1 is turned to the high-level by the first switching control circuit CNT1, and Q1 is thus turned on. The delay time  $\Delta t_{d1}$  is set in accordance with a resonance period determined based on the primary inductance

JP Application No. 2004-027036

-----

of the transformer T, the parasitic capacitance between the drain and source of Q1, and the like, such that Q1 is turned on at a time when the voltage between the drain and source of Q1 becomes zero. Thus, a zero-voltage switching operation of Q1 is performed, and the switching loss is significantly reduced.

[0037]

Then, the first switching control circuit CNT1 determines an ON-period  $ton1$  of Q1 such that the voltage of the voltage  $Vo1$  of the first output terminal OUT1 is set to a predetermined value. In other words, at time  $t1$ , that is, after the passage of  $\Delta t_{d1} + ton1$  from time  $t0$ , the first switching control circuit CNT1 turns the gate voltage of Q1 to the low-level. Thus, Q1 is turned off. The exciting energy of the transformer T is determined in accordance with the ON-period  $ton1$  of Q1. As a result, the voltage of  $Vo1$  is determined.

[0038]

(2) State 2 [ $t1-t2$ ]

When Q1 is turned off, the transformer voltage  $Vt$  inverts. The second switching control circuit CNT2 receives the voltage of the secondary winding  $Ls$  of the transformer T as a trigger signal, and turns the gate voltage of the second switching element Q2 to the high-level at time  $t1$  when the transformer voltage  $Vt$  inverts. Thus, Q2 is turned

JP Application No. 2004-027036

-----

on after the passage of a delay time  $\Delta t_{d2}$  from time  $t_1$ . The delay time  $\Delta t_{d2}$  is set in accordance with a resonance period determined based on the secondary inductance of the transformer T, the parasitic capacitance between the drain and source of Q2, and the like, such that Q2 is turned on at a time when the voltage between the drain and source of Q2 becomes zero. Thus, a zero-voltage switching operation of Q2 is performed.

[0039]

The second switching control circuit CNT 2 determines an ON-period  $\text{ton2}$  of Q2 such that the voltage of the voltage  $\text{Vo2}$  of the second output terminal OUT2 is set to a predetermined value. In other words, at time  $t_2$ , that is, after the passage of  $\Delta t_{d2} + \text{ton2}$  from time  $t_1$ , the second switching control circuit CNT2 turns the gate voltage of Q2 to the low-level.

[0040]

(3) State 3 [ $t_2$ - $t_3$ ]

Since the third switching control circuit CNT3 receives the drain voltage of Q2 as a trigger signal, when Q2 is turned off at  $t_2$ , the third switching element Q3 is turned on after the passage of a delay time  $\Delta t_{d3}$  from  $t_2$ . The delay time  $\Delta t_{d3}$  is set in accordance with a resonance period determined based on the secondary inductance of the transformer T, the parasitic capacitance between the drain

JP Application No. 2004-027036

-----

and source of Q3, and the like, such that Q3 is turned on at a time when the voltage between the drain and source of Q3 becomes zero. Thus, a zero-voltage switching operation of Q3 is performed.

[0041]

The third switching control circuit CNT3 determines an ON-period  $ton3$  of Q3 such that the voltage of the voltage  $Vo3$  of the third output terminal OUT3 is set to a predetermined value. In other words, at time  $t3$ , that is, after the passage of  $\Delta td3 + ton3$  from time  $t2$ , the third switching control circuit CNT 3 turns the gate voltage of Q2 to the low-level.

[0042]

(4) State 4 [ $t3-t0$ ]

When Q3 is turned off, after the passage of a delay time  $\Delta td4$  from the time when Q3 is turned off, the first rectifier diode Ds1 is turned on. This is because Ds1 is turned on due to application of a forward voltage to Ds1 when both Q2 and Q3 are in the OFF-state with the relationship  $Vo1 > Vo3 > Vo2$ .

[0043]

Then, the first switching control circuit CNT1 determines an ON-period  $tond$  of the rectifier diode Ds1 such that the voltage of the voltage  $Vo1$  of the first output terminal OUT1 is set to a predetermined value. When the

JP Application No. 2004-027036

-----

current of Ds1 becomes zero and an inverse current is applied, the voltage of the transformer inverts at time  $t_0$ . In other words, Ds1 is turned off at a time after the passage of  $\Delta t_{d4} + t_{ond}$  from time  $t_3$ , and the first switching control circuit CNT1 turns the gate voltage of the first switching element Q1 to the high-level after the passage of the delay time  $\Delta t_{d1}$  from time  $t_0$ . Time  $T_0$  here is equal to the initial time  $t_0$ .

[0044]

As described above, by repeating a cycle T represented in part (B) of Fig. 1 as one cycle, predetermined voltages  $V_{o1}$ ,  $V_{o2}$ , and  $V_{o3}$  can be obtained at the first to third output terminals OUT1 to OUT3, respectively.

[0045]

With this structure, the next switching element is turned off in association with one switching element in an ON-state being turned off. Thus, in other words, an on/off state of each switching element changes in the order of the lapse of time based on causality. Since a delay time is inevitably required between turning off of one switching element in an ON-state and turning on of the next switching element, this delay time constitutes a dead time. Thus, the inconvenience of two switching elements being in the ON-state at the same time basically does not occur, thus improving the reliability of a switching power-supply unit.

JP Application No. 2004-027036

-----

Furthermore, properly setting the dead time enables a zero-voltage switching operation and the like, and power conversion efficiency can be kept high without providing an unnecessarily long dead time.

[0046]

In addition, since the accumulation of ON-pulses of a switching element functions as a switching frequency, an oscillation circuit is not required. Furthermore, voltages of a plurality of outputs (three outputs in the first embodiment) whose number is equal to the number of switching elements can be stabilized independently. Although setting voltages of a plurality of output terminals to respective predetermined values is provided as conditions in this example, a current or the like, instead of a voltage, may be controlled as long as it can be controlled by an ON-period of a switching element. In other words, independent conditions whose number corresponds to the number of switching elements can be met.

[0047]

Although turning off of the first and second switching elements Q2 and Q3 is detected based on the drain voltages of Q2 and Q3 in the example described above, turning off of the switching elements may be detected by detecting currents flowing in the switching elements. In addition, although the transformer voltage is detected based on the voltage of

JP Application No. 2004-027036

-----

the secondary winding  $L_s$  of the transformer T as a trigger of Q2 in the example described above, a change in the transformer voltage may be detected based on the voltage of the primary winding  $L_p$ . Furthermore, instead of detecting falling of the transformer voltage, a change in the polarity of the transformer voltage may be detected.

[0048]

In addition, although an operation of setting an output voltage to a predetermined value in the steady state is described in the example described above, for example, by setting the maximum ON-period of each switching element at a transition time until an output voltage reaches a predetermined value, such as a starting time, a series of switching operations are repeated periodically, and a steady state is reached.

[0049]

A switching power-supply unit according to a second embodiment will be described with reference to Fig. 2. Part (A) of Fig. 2 is a circuit diagram of the switching power-supply unit, and part (B) is an illustration showing the relationship between the waveform of each section of the switching power-supply unit and time.

[0050]

In part (A) of Fig. 2, an inductor  $L_r$  is connected to the primary winding  $L_p$  of the transformer T. The second

JP Application No. 2004-027036

-----

switching element Q2 and a capacitor Cr are provided so as to form a closed loop together with the inductor Lr and the primary winding Lp. A rectification and smoothing circuit constituted by a rectifier diode Ds and a smoothing capacitor Co is connected to the secondary winding Ls of the transformer T.

[0051]

The first switching control circuit CNT1 on/off-controls the first switching element Q1, and the second switching control circuit CNT2 on/off-controls the second switching element Q2. In the figure, a broken line entering each of the switching control circuits CNT1 and CNT2 schematically indicates a trigger path, and a solid line entering each of the switching control circuits CNT1 and CNT2 schematically indicates a feedback path.

[0052]

The first switching control circuit CNT1 receives an inverting time when the voltage (transformer voltage) of the transformer T rises as a trigger. The first switching control circuit CNT1 also detects an output voltage Vo, and controls the ON-period of the first switching element Q1 such that Vo is set to a predetermined voltage.

[0053]

The second switching control circuit CNT2 receives an inverting time when the transformer voltage of the

JP Application No. 2004-027036

-----

transformer T falls as a trigger. The second switching control circuit CNT2 also detects a voltage  $v_c$  across the capacitor  $C_r$ , and controls the ON-period of Q2 such that  $v_c$  is set to a predetermined voltage or  $v_c$  does not exceed the predetermined voltage.

[0054]

In part (B) of Fig. 2,  $V_t$  represents the waveform of the transformer voltage, and Q1 and Q2 represent the states of the first and second switching elements Q1 and Q2, respectively. Here, a high-level represents an ON-state, and a low-level represents an OFF-state.

[0055]

(1) State 1 [ $t_0$ - $t_1$ ]

The first switching control circuit CNT1 receives a trigger signal at time  $t_0$ , and after the passage of a predetermined delay time  $\Delta t_1$ , the first switching control circuit CNT1 turns the gate voltage of Q1 to the high-level. Thus, Q1 is turned on. Since the output voltage  $V_o$  changes in accordance with the ON-period  $ton_1$  of the first switching element Q1,  $ton_1$  is determined such that a predetermined output voltage  $V_o$  can be obtained. In other words, at a time after the passage of  $\Delta t_1 + ton_1$  from time  $t_0$ , the gate voltage of the first switching element Q1 is turned to the low-level, and Q1 is thus turned off.

[0056]

(2) State 2 [ $t_1$ - $t_0$ ]

When Q1 is turned off, the transformer voltage  $V_t$  inverts. After the passage of a delay time  $\Delta t_2$ , the second switching control circuit CNT2 turns the gate voltage of Q2 to the high-level using the inverting time of the transformer voltage  $V_t$  as a trigger. Thus, the second switching element Q2 is turned on.

[0057]

Since the voltage  $v_c$  across the capacitor  $C_r$  changes in accordance with the ON-period  $\text{ton}_2$  of Q2,  $\text{ton}_2$  is determined such that  $v_c$  is set to a predetermined voltage. In other words, at a time after the passage of  $\Delta t_2 + \text{ton}_2$  from time  $t_1$ , the second switching control circuit CNT2 turns the gate voltage of Q2 to the low-level. Thus, Q2 is turned off.

[0058]

Since the transformer voltage  $V_t$  re-inverts when Q2 is turned off, after the passage of the delay time  $\Delta t_1$  from time  $t_0$ , the first switching control circuit CNT1 turns the gate voltage of the first switching element Q1 to the high-level using the re-inversion of the transformer voltage  $V_t$  as a trigger. Time  $t_0$  here is equal to the initial time  $t_0$ .

[0059]

As described above, by repeating a cycle T shown in part (B) of Fig. 2 as one cycle, operation as a voltage-clamped flyback converter can be achieved. In this example,

JP Application No. 2004-027036

-----

it is controlled such that the output voltage  $V_o$  to a load is kept constant and that the voltage  $v_c$  across the capacitor  $C_r$  is set to a stabilized voltage. In addition, properly setting the delay times  $\Delta t_1$  and  $\Delta t_2$  enables zero-voltage switching operations of  $Q_1$  and  $Q_2$ , thus significantly reducing the switching loss.

[0060]

Although operation as a constant-voltage power-supply unit is described in the example described above, since  $V_o$  and  $v_c$  are detected to determine the ON-periods  $ton_1$  and  $ton_2$  of the switching elements  $Q_1$  and  $Q_2$ , respectively, the voltages  $V_o$  and  $v_c$  can be controlled to satisfy predetermined conditions by controlling  $ton_1$  and  $ton_2$ , respectively.

[0061]

The first and second switching control circuits CNT1 and CNT2 may detect a voltage at the inductor  $L_r$  generated in accordance with turning off of  $Q_1$  and  $Q_2$ .

[0062]

A switching power-supply unit according to a third embodiment will be described with reference to Fig. 3. Part (A) of Fig. 3 is a circuit diagram of the switching power-supply unit, and part (B) is an illustration showing the relationship between the waveform of each section of the switching power-supply unit and time.

JP Application No. 2004-027036

-----

[0063]

Unlike the case shown in Fig. 2, a tertiary winding Lt of the transformer T is provided and a rectification and smoothing circuit constituted by the rectifier diode Ds2 and the smoothing capacitor C2 is connected to the tertiary winding Lt in this example. The second switching control circuit CNT2 detects the output voltage Vo2 of the second output terminal OUT2 and performs feedback control. The other structures are similar as in the second embodiment. This switching power-supply unit operates as a voltage-clamped flyback converter.

[0064]

Thus, the output voltages Vol and Vo2 can be kept at predetermined voltages by controlling the ON-periods ton1 and ton2 of the first and second switching elements Q1 and Q2 by the first and second switching control circuits CNT1 and CNT2, irrespective of the voltage of an input power supply vi and a load current.

[0065]

A switching power-supply unit according to a fourth embodiment will be described with reference to Fig. 4. Part (A) of Fig. 4 is a circuit diagram of the switching power-supply unit, and part (B) is an illustration showing the relationship between the waveform of each section of the switching power-supply unit and time.

JP Application No. 2004-027036

-----

[0066]

As shown in part (A) of Fig. 4, the first switching element Q1 and a capacitor Cr1 are connected to each other to form a closed loop together with the inductor Lr and the primary winding Lp of the transformer T. The first and second switching elements Q1 and Q2 are connected in series with each other, and the second switching element Q2 and a capacitor Cr2 are connected to each other to form another closed loop together with Lr and Lp. The rectifier diodes Ds1 and Ds2 are connected to secondary windings Ls1 and Ls2 of the transformer T, respectively, and they form a rectification and smoothing circuit together with the smoothing capacitor Co.

[0067]

The first switching control circuit CNT 1 receives a time when the voltage (transformer voltage) of the transformer T rises as a trigger. The first switching control circuit CNT1 also detects the output voltage Vo, and controls the ON-period of the first switching element Q1 such that Vo is set to a predetermined voltage.

[0068]

The second switching control circuit CNT2 receives a time when the transformer voltage of the transformer T falls as a trigger. The second switching control circuit CNT2 also detects the transformer voltage Vt of the transformer T,

JP Application No. 2004-027036

-----

and turns off Q2 when  $V_t$  becomes zero.

[0069]

In part (B) of Fig. 4,  $V_t$  represents the waveform of the transformer voltage, and it represents the waveform of a current flowing in the primary winding  $L_p$  of the transformer T. Also, Q1 and Q2 represent the states of the first and second switching elements Q1 and Q2, respectively. Here, a high-level represents an ON-state, and a low-level represents an OFF-state.

[0070]

(1) State 1 [ $t_0$ - $t_1$ ]

As shown in part (B) of Fig. 4, after the passage of the delay time  $\Delta t_1$  from time  $t_0$  when the transformer voltage  $V_t$  rises, the first switching control circuit CNT1 turns the gate voltage of Q1 to the high-level, and Q1 is thus turned on.

[0071]

After turning on Q1, the ON-period  $ton1$  of Q1 is determined such that the output voltage  $V_o$  is set to a predetermined voltage. In other words, at a time after the passage of  $\Delta t_1 + ton1$  from time  $t_0$ , the gate voltage of Q1 is turned to the low-level. Thus, Q1 is turned off.

[0072]

(2) State 2 [ $t_1$ - $t_0$ ]

When Q1 is turned off, the transformer voltage  $V_t$  falls.

JP Application No. 2004-027036

-----

After the passage of the delay time  $\Delta t_2$ , the second switching control circuit CNT2 turns the gate voltage of Q2 to the high-level using the time when the transformer voltage  $V_t$  falls as a trigger. Thus, the second switching element Q2 is turned on.

[0073]

When the transformer voltage  $V_t$  becomes zero, the second switching control circuit CNT2 turns the gate voltage of Q2 to the low-level. Thus, Q2 is turned off.

[0074]

When Q2 is turned off, since the transformer voltage  $V_t$  re-rises, after the passage of the delay time  $\Delta t_1$ , the first switching control circuit CNT1 turns the gate voltage of the first switching element Q1 to the high-level using the re-rising of the transformer voltage  $V_t$  as a trigger. Time  $t_0$  here is equal to the initial time  $t_0$ .

[0075]

As described above, by repeating a cycle T shown in part (B) of Fig. 4 as one cycle, operation as a current-resonance half-bridge converter can be achieved.

[0076]

According to this embodiment, when the transformer voltage  $V_t$  becomes zero, since the second switching element Q2 is turned off, the transformer current (the current it flowing in the primary winding  $L_p$  of the transformer T)

JP Application No. 2004-027036

-----

whose phase is delayed with respect to the transformer voltage  $V_t$  allows the parasitic capacitances of Q1 and Q2 to be charged and discharged, thus enabling a zero-voltage switching operation of Q1. As a result, the switching loss of Q1 and Q2 can be significantly reduced. Although both the capacitors Cr1 and Cr2 are used in Fig. 4, similar advantages can be achieved by eliminating one of the capacitors Cr1 and Cr2.

[0077]

A switching power-supply unit according to a fifth embodiment will be described with reference to Fig. 5. Part (A) of Fig. 5 is a circuit diagram of the switching power-supply unit, and part (B) is an illustration showing the relationship between the waveform of each section of the switching power-supply unit and time.

[0078]

Unlike the case shown in Fig. 2, the second switching control circuit CNT2 detects a current is flowing in the secondary winding Ls of the transformer T to determine the ON-period ton2 of the second switching element Q2.

[0079]

In part (B) of Fig. 5,  $V_t$  represents the waveform of the transformer voltage,  $i_s$  represents the waveform of the current flowing in the secondary winding Ls of the transformer T. Q1 and Q2 represent the states of the first

JP Application No. 2004-027036

-----

and second switching elements Q1 and Q2, respectively. Here, a high-level represents an ON-state, and a low-level represents an OFF-state.

[0080]

(1) State 1 [t0-t1]

After the current is becomes zero and the delay time  $\Delta t_1$  passes, the first switching control circuit CNT1 turns the gate voltage of the first switching element Q1 to the high-level, and Q1 is thus turned on. The first switching control circuit CNT1 determines the ON-period  $ton_1$  of Q1 such that the output voltage  $V_o$  is set to a predetermined voltage, and turns off Q1 at time t1.

[0081]

(2) State 2 [t1-t0]

Thus, the transformer voltage  $V_t$  inverts, and the second switching control circuit CNT2 uses the inversion as a trigger. After the passage of  $\Delta t_2$ , the second switching control circuit CNT2 turns the gate voltage of the second switching element Q2 to the high-level. Thus, Q2 is turned on. When the current is of the secondary winding  $L_s$  becomes zero, the second switching control circuit CNT2 turns the gate voltage of Q2 to the low-level using the current becoming zero as a trigger, and turns off Q2. Thus, the ON-period  $ton_2$  of Q2 is determined. This time is equal to the initial time t0 described above.

JP Application No. 2004-027036

-----

By repeating the operation described above, operation as a constant-voltage power-supply unit can be achieved.

[0082]

According to this embodiment, since the second switching element Q2 is turned off when the secondary winding current is becomes zero, the conduction period of the rectifier diode Ds and the ON-period of Q2 are equal to each other. As a result, Q2 can be turned off when the current flowing in Q2 becomes zero, and a zero-current switching operation can be performed, thus significantly reducing the switching loss. In addition, an effective current and the peak value of the current is flowing in the switching element Q2, the rectifier diode Ds, and the transformer T are reduced, thus reducing the conduction loss.

[Brief Description of the Drawings]

[0083]

[Fig. 1] Fig. 1 includes a circuit diagram and a waveform chart of a switching power-supply unit according to a first embodiment.

[Fig. 2] Fig. 2 includes a circuit diagram and a waveform chart of a switching power-supply unit according to a second embodiment.

[Fig. 3] Fig. 3 includes a circuit diagram and a waveform chart of a switching power-supply unit according to a third embodiment.

JP Application No. 2004-027036

-----

[Fig. 4] Fig. 4 includes a circuit diagram and a waveform chart of a switching power-supply unit according to a fourth embodiment.

[Fig. 5] Fig. 5 includes a circuit diagram and a waveform chart of a switching power-supply unit according to a fifth embodiment.

[Reference Numerals]

[0084]

T - transformer

Lp - primary winding

Ls - secondary winding

Vi - input power supply

Q1 - first switching element

Q2 - second switching element

Q3 - third switching element

Ds1 to Ds3 - rectifier diode

C1 - first smoothing capacitor

C2 - second smoothing capacitor

C3 - third smoothing capacitor

CNT1 - first switching control circuit

CNT2 - second switching control circuit

CNT3 - third switching control circuit

Vo1 - first output voltage

Vo2 - second output voltage

Vo3 - third output voltage

JP Application No. 2004-027036

---

OUT1 - first output terminal

OUT2 - second output terminal

OUT3 - third output terminal

Lr - inductor

Cr - capacitor

JP Application No. 2004-027036

-----

[Name of Document] ABSTRACT

[Abstract]



[Object] To solve problems due to a plurality of switching elements being in an ON-state at the same time, to be capable of setting a plurality of conditions for control to satisfy predetermined conditions, and not to require an oscillation circuit functioning as a standard.

[Solving Means] Using a time when a transformer voltage  $V_t$  inverts due to a rectifier diode  $Ds1$  entering a non-conducting state as a trigger, a first switching control circuit CNT1 turns on Q1 after a predetermined delay time passes. A second switching control circuit CNT2 turns on Q2 using a time when the transformer voltage  $V_t$  inverts due to turning off of Q1 as a trigger. A third switching control circuit CNT3 turns on Q3 using turning off of Q2 as a trigger. CNT1 determines a period  $ton1$  of Q1 such that a first output voltage  $Vo1$  is set to a predetermined value. CNT2 determines an ON-period  $ton2$  of Q2 such that a second output voltage  $Vo2$  is set to a predetermined value. CNT3 determines an ON-period  $ton3$  of Q3 such that a third output voltage  $Vo3$  is set to a predetermined value.



[Selected Figure] Fig. 1

【書類名】 図面 [Name of Document] DRAWINGS



【図 1】 [FIG. 1]

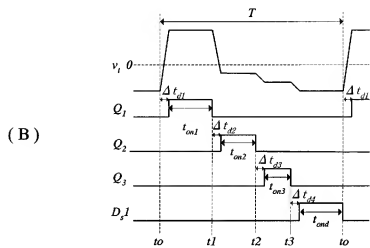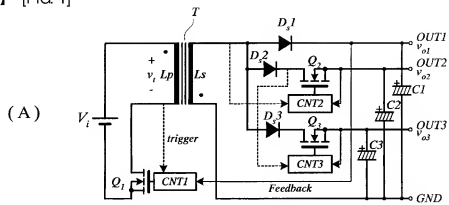

【図 2】 [FIG. 2]

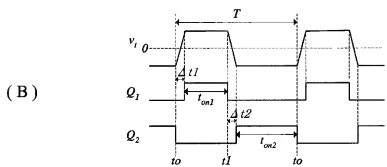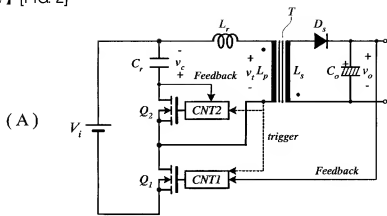


【図 3】 [FIG. 3]

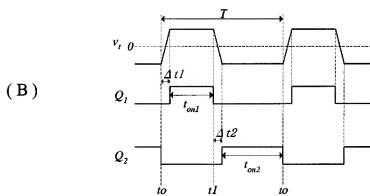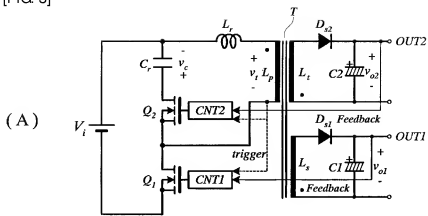

【図 4】 [FIG. 4]

(A)



(B)

